


DATA SHEET SPECIFICATION

UPG-P350

60 Hz

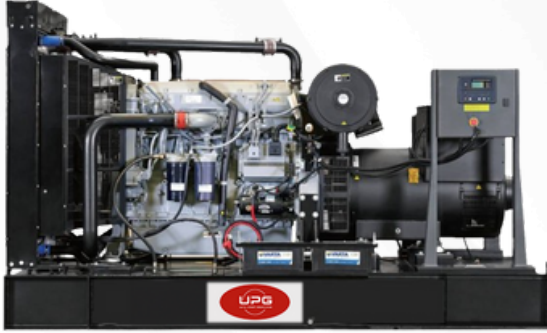

Genset Model

UPG-P350

Engine Model

Perkins 2206A-E88TAG5

Alternator Model

TAL 046 F

Controller Model

DSE 6120



Dimension

| Closed type(mm) | | Open type(mm) | |
|-----------------|------|---------------|------|
| Length | 4450 | Length | 3400 |
| Width | 1600 | Width | 1200 |
| Height | 2210 | Height | 1700 |
| Weight(kg) | 3950 | Weight(kg) | 2960 |

POWERED BY



T Three phase

W water cooled

D DIESEL

B Battery Charging Alternator

Ratings @ 0.8 PF

| VOLTAGE | FREQUENCY | PRIME RATING | | STAND-BY RATING | |
|-----------|-----------|--------------|----------|-----------------|----------|
| 230/380 v | 60 Hz | 400.0 kva | 320.0 kw | 438.0 kva | 350.0 kw |

Prime

These ratings are applicable for supplying continuous electrical power (at variable load). There is no annual hours limitation and this genset can supply 10% overload for 1 hour in 12 hours

Stand by

These ratings are applicable for supplying continuous electrical power(at variable load) in the case of emergency power supply. No overload is permitted on the ratings.

The alternator on this model is peak continuous rates(as defined in ISO 8528-5)

Some of the specifications are not standard on all Genset models.

Genset Standard Specification

| | |
|-----------------------|---|
| Model | UPG-P350 |
| Base frame | Heavy duty fabricated steel |
| Circuit breaker | ABB 3 pole MCCB(4 pole is optional) |
| Engine speed | 1800 RPM(60HZ) |
| Fuel tank capacity(L) | 1000 - Closed |
| | 660 - Open |
| Air inlet | Mounted air filter |
| Induction system | Turbo air charged and cooled |
| Combustion system | Direct injection |
| Fuel system | Fuel injection pump |
| Fuel filter | Split element |
| cooling system | Water-cooled |
| Electric Equipment | 24 v starter motor and 24 v DC alternator and ECM |

Engine Data

| | | |
|---|---|-----------------|
| Model | Perkins 2206A-E88TAG5 | |
| No of cylinder & arrangement | 6 vertical in-line | |
| Compression ratio | 16.1:1 | |
| Aspiration | Turbocharged and air-to-air charge cooled | |
| Bore and stroke(mm) | 112 x 149 | |
| Displacement / Cubic Capacity in litres | 12.5 | |
| Rotation | Anti-clockwise, viewed on flywheel | |
| Radiator cooling air flow(m³/sec) | 11.93 | |
| | 60 Hz | |
| | Prime | Stand by |
| Gross engine power kw(hp) | 373.4 (500.5) | 406.5 (545) |
| at 50% Load(l/hr) | 43.0 | - |
| at 75% Load(l/hr) | 62.0 | - |
| at 100% Load(l/hr) | 81.0 | 88.0 |
| Total lubrication system capacity(L) | 41.0 | 41.0 |
| Total Coolant capacity(L) | 30.0 | 30.0 |

Alternator Data

| | |
|---|---|
| Make | Leroy Somer |
| Model | TAL 046 F |
| Insulation class | H |
| No of bearing | 1 |
| Total harmonic content | at no load <2.5% / <2% at linear load <5% / <5% |
| Winding pitch | 2/3 |
| Ingress Protection | IP23 |
| Altitude | ≤1000m |
| Overspeed | 2250 R.P.M |
| AVR Model | R150-50 Hz / R120 - 60 Hz |
| Excitation system | SHUNT |
| Voltage regulation(steady) | ± 0.8% / ± 1% |
| AREP or PMG Excitation System Available as Optional | |

All information in this document is substantially correct at time of printing and may be altered subsequently.

matte black carbon steel
Lockable handles

Control Panel
managed by DSE 6120



insulation

Sound proof
galvanised
canopy

daily fuel tank in base frame
for 8 h operation

forklift pocket
for safe handling

Enclosure

SILENT FEATURES:

- Lockable external fuel filling point
- Internal /External fuel connection
- External oil drainage
- External coolant drainage
- Air inlet /outlet louvers
- Sound splitters at radiator side (only for 1000 KVA and above) (For 725-880 KVA vertical air discharge)
- Common earth connection
- powder coated galvanized canopy
- Cooling fan and battery charging alternator fully guarded
- Engine, radiator, fuel fill and battery can only be reached via lockable access doors

HIGLY CORROSION RESISTANCE CONSTRUCTION

- Carbon steel locks and hinges
- Body made from galvanized steel components
- treated with polyester powder coating

TRANSPORTABILITY

- Tested and certified single point lifting facility
- Forklift legs available

SOUND PRESSURE LEVEL

- 80 - 85 dBA at 3 meters (standard)

SECURITY AND SAFETY:

- Control panel viewing window in a lockable access door
- Emergency stop push button (red) fixed externally for quick access
- Cooling fan and battery charging alternator fully guarded
- Fuel fill and battery can only be reached via lockable access doors
- Exhaust silencing system totally enclosed for operator safety

Control Panel Data

| | |
|-------|---------------|
| Make | Deep Sea |
| Model | DSE 6120 MKII |



Controller key features

The DSE DSE 6120 is an Auto Start Control Module for single genset applications. It includes a backlit LCD display which clearly shows the status of the engine all the times. This module can either be programmed using the front panel or by using the DSE configuration suite PC software.

Metering and Alarm indications:

- Generator frequency
- Underspeed, Overspeed
- Generator volts (L-L, L-N)
- Generator current
- Engine oil pressure
- Engine coolant temperature
- Hours run counter
- Battery volts
- Fail to start/stop
- Emergency stop
- Charge fail
- Low DC voltage

FUEL SYSTEM

On Generating Sets up to 700 KVA, the baseframe design is incorporated with an integral fuel tank with a capacity of approx. 8 hours running at Full Load. The tank is supplied complete with fill cap breather, fuel feed and return lines to the Engine and drain plug.

| | |
|--------------------------------------|-------|
| Silencer noise reduction level | 60 Hz |
| dBA | 13 |
| Max allowable pressure | 60 Hz |
| Kpa | 10 |
| Exhaust gas flow m ³ /min | 60 Hz |
| Prime | 67.5 |
| Standby | 67.5 |
| Exhaust gas temperature °C | 60 Hz |
| Prime | 630 |
| Stand by | 630 |

AUTOMATIC VOLTAGE REGULATOR (AVR)

The fully sealed Automatic Voltage Regulator maintains the Voltage Regulation at ±1%. Nominal adjustment by means of a trim pot incorporated on the AVR.

MOTOR STARTING

An overload capacity equivalent to 300% of the Full Load impedance at zero Power Factor can be sustained for 10 seconds, when PMG option is fitted.

COUPLING

The Engine and Alternator are directly coupled by means of an SAE flange. The Engine flywheel is flexibly coupled to the Alternator rotor.

ANTI-VIBRATION MOUNTING PADS

Anti-Vibration pads are affixed between the Engine / Alternator feet and the Baseframe thus ensuring complete vibration isolation of the rotating assembly.

SAFETY GUARDS

The Fan & Fan Drive along with the Battery Charging Alternator are Safety Guard protected for personnel protection.

FACTORY TESTS

The Generating set is load tested before dispatch All protective devices control functions and site load conditions are simulated. The generator and it's systems are checked before dispatch.

DOCUMENTATIONS

Operation & Maintenance manual, Circuit wiring diagrams and Commissioning / Fault Finding accompanied with the Generator.

QUALITY STANDARDS

Following standards: ISO 8528/1, ISO 3046/1, BS 5514/1.

WARRANTY

All of the Generating Sets are covered under a warranty policy for a period of 12 months. Warranty of the equipment is in line with manufacturers warranty terms & conditions.